

Item-No. C-48485



AC Worldwide 100-240V	60 Watt	ONE Output
6A Charge Current	Li-Po 2-4	Li-Po HV 2-4
Li-Ion 2-4	Ni-Cd 6-8	Ni-MH 6-8
		PB 2-12V

INSTRUCTION MANUAL



TABLE OF CONTENTS

INTRODUCTION.....	03
SPECIAL FEATURES.....	05
WARNING AND SAFETY NOTES.....	07
PROGRAM FLOW CHART.....	10
OPERATION.....	11
OPERATING PROGRAM.....	12
CHARGING PROGRAM.....	15
BATTERY MEMORY SET AND CALL OUT.....	16
SYSTEM SETTING.....	18
BATTERY METER.....	20
BATTERY RESISTANCE METER.....	21
WARNING AND ERROR MESSAGE.....	22
SOFTWARE “CHARGE MASTER”.....	23
THE SET CONTAINS.....	23
SPECIFICATION.....	24
CONFORMITY DECLARATION.....	25
COMMONLY USED TERMS.....	26
WARRANTY AND SERVICE.....	27



INTRODUCTION

Congratulations on your choice of Team Corally Race 60 AC Professional Balance Charger/Discharger. This unit is simple to use, but the operation of a sophisticated automatic charger such as Race 60 does require some knowledge on the part of the user. These operating instructions are designed to ensure that you quickly become familiar with its functions. It is therefore important that you read right through the Operating Instructions, Warning and Safety Notes before you attempt to use your new charger for the first time. We hope you have many years of pleasure and success with your new battery charger.

Team Corally Race 60 is an AC input charger/discharger with compact size (112x106x54mm). Like most TC chargers, it supports TVC (Terminal Voltage Control), Battery Meter and can be connected to PC for PC control and firmware upgrade. And there are Automatic Charging Current Limit, Capacity Limit, Temperature Threshold and Processing Time Limit for maximum safety.

The maximum charging power of Race 60 is 60W with maximum charging current 6A and discharging current 2A. It is a high-performance micro processor control charge/discharge station with battery management suitable for use with all current battery types, LiPo, Lilon, LiFe, NiCd, NiHM, PB and also new generation LiHV with end voltage 4.35V.

Please BE SURE to read these INSTRUCTIONS, WARNING and SAFETY NOTES before you use the charger for the first time. It can be dangerous to mis-handle batteries and battery chargers, as there is always a risk of batteries catching fire and exploding.

Factory Team Selected



INTRODUCTION

Please read this entire operating manual completely and attentively before using this product, as it covers a wide range of information on operating and safety. Or please do use this product in company with a specialist!



Optimized Operating Software

Team Corally Race 60 features the so-called AUTO function that set the feeding current during the process of charging or discharging. Especially for lithium batteries, it can prevent the over-charging which may lead to an explosion due to the user's fault. It can disconnect the circuit automatically and alarm once detecting any malfunction. All the programs of this product were controlled through two way linkage and communication, to achieve the maximum safety and minimize the trouble. All the settings can be configured by users!

Battery Memory (Data Store/Load)

The charger can store up to 10 different charge/discharge profiles for your convenience. You can keep the data pertaining to program setting of the battery of continuous charging or discharging. Users can call out these data at any time without any special program setting.

Terminal Voltage Control (TVC)

The charger allows user to change the end voltage. (for expert user only)

PC Control Software "Charge Master"

The free "Charge Master" software gives you unparalleled ability to operate the charger through the computer. You can monitor pack voltage, cell voltage and other data during the charging, view charge date in real-time graphs. And you can initiate, control charging and update firmware from "Charge Master".

Internal Independent Lithium Battery Balancer

Race 60 employs an individual-cell-voltage balancer. It isn't necessary to connect an external balancer for balance charging.

Balancing Individual Cells Battery Discharging

During the process of discharging, Race 60 can monitor and balance each cell of the battery individually. Error message will be indicated and the process will be ended automatically if the voltage of any single one cell is abnormal.

Adaptable to Various Type of Lithium Battery

Race 60 is adaptable to various types of lithium batteries, such as LiPo, Lilon, LiFe and the new LiHV batteries.

Fast and Storage Mode of Lithium Battery

Purposes to charge lithium battery varies, 'fast' charge reduce the duration of charging, whereas 'store' state can control the final voltage of your battery, so as to store for a long time and protect useful time of the battery.

Factory Team Selected



FEATURES

Re-Peak Mode of NiMH/NiCd Battery

In re-peak charge mode, the charger can peak charge the battery once, twice or three times in a row automatically. This is good for making certain the battery is fully charged.

Delta-peak Sensitivity for NiMH/NiCd

Delta-peak sensitivity for NiMH/NiCd battery: The automatic charge termination program based on the principle of the Delta-peak voltage detection. When the battery's voltage exceeds the threshold, the process will be terminated automatically.

Cyclic Charging/Discharging

1 to 5 cyclic and continuous process of charge > discharge or discharge > charge is operable for battery refreshing and balancing to stimulate the battery's activity.

Automatic Charging Current Limit

You can set up the upper limit of the charging current when charging your NiMH or NiCd battery, it is useful for the NiMH battery of low impedance and capacity in the 'AUTO' charging mode.

Battery Meter

The user can check battery voltage and battery internal resistance.

Capacity Limit

The charging capacity is always calculated as the charging current multiplied by time. If the charging capacity exceeds the limit, the process will be terminated automatically when you set the maximum value.

Temperature Threshold*

The battery's internal chemical reaction will cause the temperature of the battery to rise. If the temperature limit is reached, the process will be terminated.

* This function is available by connecting optional temperature probe, which is not included in the package.

Processing Time Limit

You can also limit the maximum process time to avoid any possible defect.



WARNING AND SAFETY NOTES

These warnings and safety notes are particularly important.

Please follow the instructions for maximum safety; otherwise the charger and the battery can be damaged or at worst it can cause a fire.

- ❗ Never leave the charger unattended when it is connected to its power supply. If any malfunction is found, **TERMINATE THE PROCESS AT ONCE** and refer to the operation manual.
- ❗ Keep the charger well away from dust, damp, rain, heat, direct sunshine and vibration. Never drop it.
- ❗ The allowable AC input voltage is 100~240V AC
- ❗ This charger and the battery should be put on a heat-resistant, noninflammable and non-conductive surface. Never place them on a car seat, carpet or similar. Keep all the inflammable volatile materials away from operating area.
- ❗ Make sure you know the specifications of the battery to be charged or discharged to ensure it meets the requirements of this charger. If the program is set up incorrectly, the battery and charger may be damaged .It can cause fire or explosion due to overcharging.

Standard Battery Parameters

Be very careful to choose the correct voltage for different types of battery otherwise you may cause damage to the batteries. Incorrect settings could cause the cells to fire or explode.

Battery Type	Fast Charge Rate	Nominal Cell Voltage	Max. Charge Voltage Cell	Min. discharge Voltage Cell	Storage Voltage Cell
Ni-Cd	1 - 2C	1.2V	1.5V	0.85V	
Ni-MH	1 - 2C	1.2V	1.5V	0.85V	
Li-Ion	$\leq 1C$	3.6V	4.1V	2.5V	3.7V
Li-Po	$\leq 1C$	3.7V	4.2V	3.0V	3.8V
Li-Po HV	$\leq 1C$	3.8V	4.35V	3.3V	3.9V
Li-Fe	$\leq 4C$	3.3V	3.6V	2.0V	3.3V
PB	$\leq 0.4C$	2V	2.46V	1.75V	



WARNING AND SAFETY NOTES

❗ Never attempt to charge or discharge the following types of batteries.

A battery pack which consists of different types of cells (including different manufacturers)

A battery that is already fully charged or just slightly discharged.

Non-rechargeable batteries (Explosion hazard).

Batteries that require a different charge technique from NiCd, NiMh, LiPo or Gelcell (Pb, Lead acid).

A faulty or damaged battery.

A battery fitted with an integral charge circuit or a protection circuit.

Batteries installed in a device or which are electrically linked to other components.

Batteries that are not expressly stated by the manufacturer to be suitable for the currents the charger delivers during the charge process.

❗ Please bear in mind the following points before commencing charging:

Did you select the appropriate program suitable for the type of battery you are charging?

Did you set up adequate current for charging or discharging?

Have you checked the battery voltage? Lithium battery packs can be wired in parallel and in series, i.e. a 2 cell pack can be 3.7V (in parallel) or 7.4V (in series).

Have you checked that all connections are firm and secure?

Make sure there are no intermittent contacts at any point in the circuit.

❗ Charging

During charge process, a specific quantity of electrical energy is fed into the battery. The charge quantity is calculated by multiplying charge current by charge time. The maximum permissible charge current varies depending on the battery type or its performance, and can be found in the information by the battery manufacturer. Only batteries that are expressly stated to be capable of quickcharge are allowed to be charged at rates higher than the standard charge current.

Connect the battery to the terminal of the charger: red is positive and black is negative. Due to the difference between resistance of cable and connector, the charger can not detect resistance of the battery pack, the essential requirement for the charger to work properly is that the charge lead should be of adequate conductor cross-section, and high quality connectors which are normally goldplated should be fitted to both ends.

Always refer to the manual by battery manufacturer about charging methods, recommended charging current and charging time. Especially, the lithium battery should be charged according the charging instruction provided by the manufacturer strictly.



WARNING AND SAFETY NOTES

Attention should be paid to the connection of lithium battery especially.

Do not attempt to disassemble the battery pack arbitrarily.

Please get highlighted that lithium battery packs can be wired in parallel and in series. In the parallel connection, the battery s capacity is calculated by multiplying single battery capacity by the number of cells with total voltage stay the same. The voltages imbalance may cause fire or explosion .Lithium battery is recommended to charge in series.

❗ Discharging


The main purpose of discharging is to clean residual capacity of the battery, or to reduce the battery voltage to a defined level. The same attention should be paid to the discharging process as charging. The final discharge voltage should be set up correctly to avoid deep-discharging. Lithium battery can not be discharged to lower than the minimum voltage, or it will cause a rapid loss of capacity or a total failure. Generally, lithium battery doesn't need to be discharged. Please pay attention to the minimum voltage of lithium battery to protect the battery.

Some rechargeable batteries have a memory effect. If they are partly used and recharged before the whole charge is accomplished, they remember this and will only use that part of their capacity next time. This is a memory effect. It is said that NiCd and NiMH batteries are suffering from memory effect. NiCd has more memory effect than NiMH.

Factory Team Selected



PROGRAM FLOW CHART

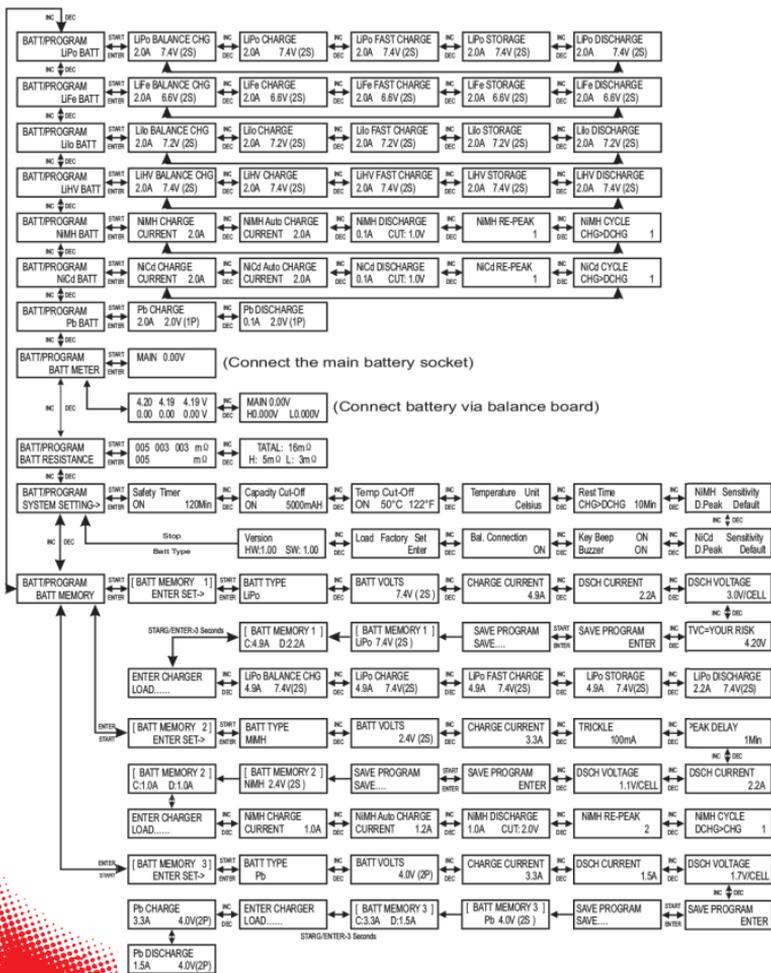

**BATT PROG / STOP Button:**

It is used to stop the progress or go back to previous step/screen

DEC Button:

It is used to go through the menus and decrease the parameter value

INC Button:

It is used to go through the menus and increase the parameter value

ENTER / START Button:

It is used to enter parameter or store parameter on screen.

When you are willing to alter the parameter value in the program, press the START/ENTER button to make it blink then change the value by pressing DEC and INC button. The value will be stored by re-pressing the START/ENTER button. If there is another parameter can be altered in the same screen, when you confirm the first parameter value, the next parameter value will start to blink which means it is ready to alert.

When you are willing to start the progress, press and hold the START/ENTER button for 3 seconds. When you are willing to stop the progress or go back to previous step/screen, press the BATT PROG/STOP button once.

When you power on the charger, it will enter LiPo Battery balance program directly. You could change the mode (balance mode, normal charge mode, fast charge mode, store mode or discharge mode), enter the desired charging/discharging mode, set the referred parameter and start the progress.

If you have no request for LiPo Battery program, please press the BATT PROG/STOP button to enter BATT PROGRAM screen.

Factory Team Selected



OPERATING PROGRAM

Here is the detailed procedure to make the charger work. All the screens and operations will take Li-Po BALANCE CHARGE program for example:

1. Connection

A) Connecting to power source

It is an AC charger only.

Please insert the AC power cord to the wall socket (100-240V) directly to power it on.


B) Connecting the battery

Important: Before connecting a battery it is absolutely essential to check one last time that you have set the parameters correctly. If the settings are incorrect, the battery may be damaged, and could even burst into flames or explode. To avoid short circuits between the banana plugs, always connect the charge leads to the charger first, and only then to the battery. Reverse the sequence when disconnecting the pack.

C) Balance Socket

In default setting, for safety issue, it requests to use balance charging wire with balance board to charge Lithium batteries in all modes.

If the charging battery has no balance wire, please disable this function in system setting program as following.



The balance wire attached to the battery must be connected to the charger with the black wire aligned with the negative marking. Take care to maintain correct polarity! (See the wiring diagram below.)

This diagram shows the correct way to connect your battery to the Race 60 while charging in the balance charge program mode.

WARNING

Failure to connect as shown in this diagram will damage this charger.

To avoid short circuit between the charge lead always connect the charge cable to the charger first, then connect the battery.

Reverse the sequence when disconnecting.



OPERATING PROGRAM

Locate the flowcharts show the entire programming menu. It is highly recommended to have these flowcharts handy while learning to operate this charger.

There are two main ways in which to set the charger:

- (1). A memory profile is available for setting and storing pertinent information for up to 10 different batteries. Once a battery's information is stored into a memory it will be retained until changed again manually. Recalling a battery's memory number makes the charger instantly ready to go!
- (2). If you do not use the battery memories, this charger can be manually set before each use.

For following step, all are basing on manually set

BATT./PROGRAM
LiPo BATT

START/ENTER

LiPo BALANCE CHG
2.0A 11.1V (3S)

START/ENTER
> 3 Seconds

BATTERY CHECK
WAIT...

R: 3SER S: 3SER
CANCEL(STOP)

3. BATT./PROGRAM Select

Press INC and DEC to go through all the programs and press START/ENTER to enter LiPo BATT Program.

4. Mode Select

Press INC and DEC to go through all the modes and press START/ENTER to enter LiPo Balance Charge Mode.

5. Battery Setting

Press START/ENTER, the current value will start to blink, press INC and DEC to change the value and press START/ENTER to confirm your setting. At the same time, the battery cells number will start to blink, press INC and DEC to change the value and press START/ENTER to confirm your setting.

6. Program Start

Press and hold START/ENTER for 3 seconds to start the program.

The charger is detecting the battery cell.

R shows the number of cells detected by the charger and S is the number of cells set by you at the previous screen. If both numbers are not identical, press STOP to go back to previous screen to recheck the number of cells before going ahead.



OPERATING PROGRAM

R: 3SER S: 3SER
CONFIRM(ENTER)

START/ENTER

LP4s 1.5A 12.14V
BAL 000:50 00022

R shows the number of cells detected by the charger and S is the number of cells set by you at the previous screen. If both numbers are identical, press START/ENTER to start charging process.

7. Charging Status Monitor

During charge process, real-time status will be showed as left screen.

VARIOUS INFORMATION DURING THE PROCESS

Press INC or DEC during charging or discharging process, you can inquire various information on LCD screen .

LP4s 1.5A 12.14V
BAL 000:50 00022

Real-time status: battery type, battery cell, charge current, battery voltage, elapsed time and charged capacity.

↕ INC ▶

4.07 4.06 4.11 V
0.00 0.00 0.00 V

Voltage of each cell in the battery pack when the battery is connected with balance lead.

▶ ↕ INC

Fuel= 90%
Cell= 4.10V

Charged capacity percentage and average cell voltage of the battery pack.

LP4s 1.5A 12.14V
BAL 000:50 00022

◀ ↕ DEC

End Voltage
12.60(C3S)

Final voltage when the program ends.

◀ ↕ DEC

Ext. Temp ----
Int. Temp 37°C

Internal temperature.

Temperature probe is needed to show external temperature

◀ ↕ DEC

Temp Cut-Off
50°C

Cut off temperature

◀ ↕ DEC

Safety Time
ON 200min

Safety timer ON and duration of time in minutes

◀ ↕ DEC

Capacity Cut-Off
ON 500mAh

Capacity cut-off ON and the setting value of capacity.



8. Program Stop

During the charging process, press STOP to stop the charging process.

9. Program Complete

When the charging process finishes, an audible sound will be heard

Charging Program

Depends on different battery type, the operation programs are different.

Batt TYPE	OPERATION PROGRAM	DESCRIPTION
LiPO LiHv Lilon LiFe	CHARGE	This charging mode is for charging LiPo/LiHV/LiFe/Lilon battery in normal mode.
	DISCHARGE	This mode is for discharging LiPo/LiHV/LiFe/Lilon battery.
	STORAGE	This program is for charging or discharging lithium battery which will not be used for long time.
	FAST CHG	The charging capacity may be a bit smaller than normal charging but the process time will be reduced.
	BAL CHARGE	This mode is for balancing the voltage of lithium-polymer battery cells while charging.
NIMH NICD	CHARGE	The charger will charge NiMH and NiCd batteries using the charge current set by the user.
	AUTO CHG	In this program the charger detects the condition of the battery which is connected to the output and automatically charges the battery. Note: you should set up the upper limit of the charge current to avoid damage by excessive feeding current. Some batteries of low resistance and capacity can lead to higher current.
	DISCHARGE	This mode is for discharging NiMH/NiCd battery.
	RE-PEAK	In re-peak charge mode, the charger can peak charge the battery once, twice or three times in a row automatically. This is good for confirming the battery is fully charged, and for checking how well the battery receives fast charges.
	CYCLE	1 to 5 cyclic and continuous process of charge>discharge or discharge>charge is operable for battery refreshing and balancing to stimulate the battery's activity.
PB	CHARGE	This mode is for charging Pb battery.
	DISCHARGE	This mode is for discharging Pb battery.



BATTERY MEMORY SET AND CALL OUT

The charger can store up to 10 different charge/discharge profiles for your convenience, and the stored profiles can be recalled quickly without having to go through the setup process. When you are willing to alter the parameter value in the program, press START/ENTER to make it blink then change the value with INC or DEC. The value will be stored by pressing START/ENTER once.

Note: All following screen are taking 2S(7.4V) LiPo battery for example

1. Battery Memory Set

[BATT MEMORY 1]
ENTER SET->

Enter the battery memory program.
(10 different charge/discharge profiles can be stored).

START/ENTER

BATT TYPE
LiPo

Set the battery type(LiPo/LiHV/LiFe/Lilon/NiMH/NiCd/Pb).

◀DEC INC▶

BATT VOLTS
7.4V < 2S >

Set the voltage and number of cells(2S-4S).

◀DEC INC▶

CHARGE CURRENT
4.9A

Set the charge current(0.1-6.0A).

◀DEC INC▶

DSCH CURRENT
2.0A

Set the discharge current (0.1A-2.0A).

◀DEC INC▶

DSCH VOLTAGE
3.0V/CELL

Set the discharge voltage(3.0-3.3V/Cell).

◀DEC INC▶

TVC=YOUR RISK
4.20V

Set the terminal voltage(4.18-4.25V).

◀DEC INC▶

SAVE PROGRAM
ENTER

Press ENTER to save program.

START/ENTER



BATTERY MEMORY SET AND CALL OUT

SAVE PROGRAM
SAVE .



[BATT MEMORY 1]
LiPo 7.4V (2S)

Indicate the battery type and battery cell of the saved profile.



[BATT MEMORY 1]
C: 4.9A D: 2.2A

Indicate the charge and discharge current of the saved profile.
Press the START/ENTER for 3 seconds to call out the memory.

START/ENTER
>3 Seconds



ENTER CHARGER
LOAD

Load the memory set



LiPo BALANCE CHG
4.9A 7.4V(2S)

Press START/ENTER for 3 seconds to start the process.

2. Battery Memory Call Out

Factory Team Selected



SYSTEM SETTING

It will be operated with the default value of the essential user settings when it is powered on for the first time. The screen displays the following information in sequence and the user can change the value of parameter on each screen.

When you are willing to alter the parameter value in the program, press START/ENTER to make it blink then change the value with INC or DEC. The value will be stored by pressing START/ENTER once.

ITEM	SELECTION	DESCRIPTION
	OFF/ON (1-720min)	When you start a charge process, the integral safety timer automatically starts running at the same time. This is programmed to prevent overcharge the battery if it proves to be faulty, or if the termination circuit cannot detect the battery full. The value for the safety timer should be generous enough to allow a full charge of the battery.
	OFF/ON (100-50000mAh)	This program sets the maximum charge capacity that will be supplied to the battery during charge. If the delta peak voltage is not detected nor the safety timer expired by any reason, this feature will automatically stop the process at the selected capacity value.
	OFF/ON (20°C/68°F- 80°C/176°F)	The battery's internal chemical reaction will cause the temperature of the battery to rise. If the temperature limit is reached, the process will be terminated.
	Celsius Fahrenheit	You can choose the temperature displayed by Celsius or Fahrenheit as you like.
	1-60min	A rest time allowing the battery to cool down between charging/discharging cycle.



SYSTEM SETTING

ITEM	SELECTION	DESCRIPTION
NiMH Sensitivity D.Peak Default NiCd Sensitivity D.Peak Default	Default: 4mV/Cell 3-15mV/Cell	This program is for NiMH/NiCd battery only. When the charger detects the delta peak value reaches the value you set, the charger will say the battery is fully charged.
Key Beep ON Buzzer ON	OFF/ON (The beep sounds at every time touching the buttons to confirm your action. The beep or melody sounded at various times during operation to alert different mode changes.
Bal. Connection ON	OFF/ON	For safety issue, when charging Lithium batteries, you are requested to connect the balance wire of the battery to balance sockets in any modes, such as Fast Charge, Storage Mode. This function can be disable here.
Load Factory Set Enter		Press ENTER to load factory default setting.
Version HW: 1.00 FH: 1.10		It indicates the hardware and firmware version.


Factory Team Selected



BATTERY METER

The user can check battery's total voltage, the highest voltage, the lowest voltage and each cell's voltage.

Please connect the battery to the charger main battery lead to battery socket and balance wires to balance socket.



Press the START/ENTER to enter the Lithium Battery Meter program.

The screen indicate each cell's voltage.

The screen indicate the total voltage, the highest voltage and the lowest voltage

BATTERY RESISTANCE METER

The user can check battery's total resistance, the highest resistance, the lowest resistance and each cell's resistance.

Please connect the battery to the charger main battery lead to battery socket and balance wires to balance socket.



BATT/PROGRAM
BATT RESISTANCE

Start
Enter

012 005 005 mΩ
006 mΩ

INC

TOTAL: 28mΩ
H: 12mΩ L: 5mΩ

Press the START/ENTER to enter the Lithium Battery

The screen indicate each cell's resistance

The screen indicate the total resistance, the highest

Factory Team Selected



WARNING AND ERROR MESSAGE

In case of an error the screen will display the cause of error and emit an audible sound.

REVERSE POLARITY

Incorrect polarity connected.

CONNECTION BREAK

The battery is interrupted

CONNECT ERROR
CHECK MAIN PORT

The battery connection is wrong

BALANCE CONNECT
ERROR

The balance connect is wrong.

CELL ERROR
LOW VOLTAGE

Voltage of one cell in the battery pack is too low

CELL ERROR
HIGH VOLTAGE

Voltage of one cell in the battery pack is too high

CELL ERROR
VOLTAGE-INVALID

Voltage of one cell in the battery pack is invalid

CELL NUMBER
INCORRECT

The cell number is wrong

INT. TEMP. TOO HI

The internal temperature of the unit goes too high

EXT. TEMP. TOO HI

The external temperature of the battery goes too high

OVER CHARGE
CAPACITY LIMIT

The battery capacity is more than the maximum capacity which the user sets.

OVER TIME LIMIT

The charging time is longer than the maximum charging time which the user sets

BATTERY HAS FULL

The battery voltage is higher than the maximum voltage which the user sets when charging in balance mode



SET CONTENTS

THE SET CONTAINS

1. TC Race 60 Charger
2. Power Cord
3. 18 AWG Charging Cable with XT60 connector



Factory Team Selected



SPECIFICATION

- AC Input Voltage : 100-240V
- Display Type: 2x16 LCD Display
- Case Material: Plastic
- Case Size: 112x106x52mm
- PC Communications: USB Port for PC Control & Firmware Upgrade
- External Port: 2-4S Balance Socket-XH, Temperature Probe Socket, Battery Socket, Micro USB Port for PC.
- Delta Peak Detection for NiMH/NiCd: 3-15mV/cell / Default: 4mV/cell
- Battery Cutoff Temperature: 20°C/68°F-80°C/176°F(adjustable)
- Charge Voltage: NiMH/NiCd: Delta peak detection
 - LiPo: 4.18-4.25V/cell
 - LiHV: 4.25-4.35V/cell
 - LiFe: 3.58-3.7V/cell
 - Lilon: 4.08-4.2V/cell
- Balance Current: 200mA/cell
- Reading Voltage Range: 0.1-26.1V/cell
- Battery Types/Cells: LiPo/LiHV/LiFe/Lilon: 2-4cells
 - NiMH/NiCd: 6-8cells
 - Pb: 3-6cells
- Battery Capacity Range: NiMH/NiCd: 100-50000mAh
 - LiPo/LiHV/LiFe/Lilon: 100-50000mAh
 - Pb: 100-50000mAh
- Charge Current: 0.1A-6.0A
- Safety Timer: 1-120minutes off
- Charge Wattage: 60W
- Discharge Current: 0.1A-2.0A
- Discharge Cut-off Voltage: NiMH/NiCd: 0.1-1.1V/cell
 - LiPo: 3.0-3.3V/cell LiHV: 3.1-3.4V/Cell
 - LiFe: 2.6-2.9V/cell Lilon: 2.9—3.2V/cell
 - Pb: 1.8V/cell
- Discharge Wattage: 10W
- Balance Cells: 2-4 cells
- Memory: 10 different charge/discharge profiles
- Charge Method: CC/CV for lithium types and lead (Pb) batteries
 - Delta-peak Sensitivity for NiMH/NiCd



Commonly used terms

Final charge voltage: the voltage at which the battery's charge limit (capacity limit) is reached. The charge process switches from a high current to a low maintenance rate (trickle charge) at this point. From this point on further high current charging would cause overheating and eventual terminal damage to the pack.

Final discharge voltage: the voltage at which the battery's discharge limit is reached. The chemical composition of the batteries determines the level of this voltage. Below this voltage the battery enters the deep discharge zone. Individual cells within the pack may become reverse polarized in this condition, and this can cause permanent damage.

A, mA: unit of measurement relating to charge or discharge current. $1000 \text{ mA} = 1 \text{ A}$ (A=Ampere, mA=Milliampere)

Ah, mAh: unit of measurement for the capacity of a battery (Amperes x time unit; h = hour). If a pack is charged for one hour at a current of 2 A, it has been fed 2 Ah of energy. It receives the same quantity of charge (2 Ah) if it is charged for 4 hours at 0.5 A, or 15 minutes (=1/4 h) at 8 A.

'C'-rating: Capacity is also referred to as the 'C' rating. Some battery suppliers recommend charge and discharge currents based on the battery 'C' rating. A battery's '1C' current is the same number as the battery's rated capacity number, but noted in mA or amps. A 600mAh battery has a 1C current value of 600mA, and a 3C current value of (3 x 600mA) 1800mA or 1.8A. The 1C current value for a 3200mAh battery would be 3200mA (3.2A).

Nominal voltage(V): The nominal voltage of the battery pack can be determined as follows;

- NiCd or NiMH: multiply the total number of cells in the pack by 1.2. A 8-cell pack will have a nominal voltage of 9.6 volts (8x1.2).
- LiPo: multiply the total number of cells in the pack by 3.7. A 3-cell LiPo wired in series will have a nominal voltage of 11.1 volts (3x3.7).
- Lilo: multiply the total number of cells in the pack by 3.6. A 2-cell Lilo wired in series will have a nominal voltage of 7.2 volts (2x3.6).
- LiFe: multiply the total number of cells in the pack by 3.3. A 4-cell Lilo wired in series will have a nominal voltage of 13.2 volts (4x3.3).

If the nominal voltage of the battery is not printed on the battery's label, consult your battery manufacturer or supplier.

Factory Team Selected



WARRANTY CONDITIONS & LIABILITY DISCLAIMER

If material defects or manufacturing faults should arise in a product distributed or manufactured by Team Corally, a division of JSP Group Intl BVBA, and purchased by a consumer, we Team Corally acknowledge the obligation to correct those faults or defects within the limitations described below. This manufacturer's warranty is in addition to, and does not affect, the legal or contractual rights of the consumer which arise from the purchase of such products. Team Corally guarantees the consumer that its products are free from material, manufacturing, and construction faults, as determined by the general state of knowledge and technology valid at the time of manufacturing. The fault responsible for causing the damage must be proven to have been present in the product at this time. Claims for compensation arising from consequential damage or product liability will not be considered valid unless they fall under preemptory provisions of the law. If material defects or manufacturing faults should arise in a product distributed or manufactured by Team Corally in the European community (EC) and purchased by a consumer, then Team Corally undertakes to correct those defects within the limitations described below.

This manufacturer's declaration does not affect the consumer's legal or contractual rights regarding defects arising from the purchase contract between the consumer and the dealer or reseller.

Extend of the Warranty

If a claim is made under warranty, we take at our discretion to repair or replace the defective goods. We will not consider supplementary claims, especially for reimbursement of costs relating to the defect (e.g. installation / removal costs) and compensation for consequent damages unless they are allowed by statute. This does not affect claims on legal regulations, especially according to the product liability law.

Provisions of the Warranty

The purchaser is required to make the warranty claim in writing, and must enclose original proof of purchase (e.g. invoice, receipt, delivery note) and the appropriate warranty card. He must send the defective goods to our **local representatives or directly to Team Corally,**

a division of JSP Group Intl BVBA, Geelseweg 80, 2250 Olen, Belgium at his own risk and cost.

The purchaser should state the material defect or manufacturing fault, or symptoms of the fault, as accurate as possible, so that we can check if our warranty obligation is applicable.



WARRANTY CONDITIONS & LIABILITY DISCLAIMER

The goods are transported from the consumer to us, and from us to the consumer, entirely at the risk and cost of the consumer.

Invalidation of the Warranty

The consumer cannot make a claim under warranty when the fault is affecting the use of the product arising from natural wear, competition use, or improper use (including installation) or external forces. The consumer's adherence to the building and operating instructions relevant to the model, including the installation, operation, use of, and maintenance of, model-related components cannot be supervised by Team Corally. Therefore Team Corally is in no way liable for loss, damage, or costs resulting from improper use, or behaviour in any way connected to the above described provisions. Unless otherwise required by law, Team Corally is in no way whatever liable to provide compensation for damages arising from the improper use of the model (including personal injury, death, damage to buildings, loss of turnover, loss of business, or interruption of business, or any other direct, or indirectly caused, consequential damage).

Duration of Validity

The claim period is 24 months from the date of purchase of the product by the consumer from a dealer in the European Community (EC) counted from the date of purchase. The claim period is 12 months from the date of purchase of the product by the consumer from a dealer outside the European Community (EC) counted from the date of purchase. If a defect arises after the end of the claim period, or if evidence or documents required according to this declaration in order to make the claim valid are not presented until after this period, then the consumer forfeits any rights or claims from this declaration. The guarantee period is not prolonged by the granting of any claims within the framework of this warranty, especially in the case of repair or replacement. The guarantee period also does not restart in such cases.

Warranty Expiration

If we do not acknowledge the validity of a claim based on this declaration within the claim period, all claims based on this declaration will expire after six months from the time of registering the claim; however this cannot occur prior to the end of the claim period.

Factory Team Selected



WARRANTY CONDITIONS & LIABILITY DISCLAIMER

Applicable Law

This declaration, and the claims, rights and obligations arising from it, are based exclusively on the pertinent Belgium Law, without the norms of international private law, and excluding UN retail law. Place of fulfilment for liabilities arising from this declaration is Olen, Belgium. Court of jurisdiction is Turnhout, Belgium.

Copyright

This manual is protected by a copyright. Any publication, transmission or commercial use of this manual is prohibited without written permission. Team Corally and JSP Group Intl BVBA assumes no responsibility for printing errors in this manual. This manual is subject to technical changes.



WEEE: At the end of this device's useful life, please remove all the batteries and dispose of them separately. Take electrical appliances to the local collection points for waste electrical and electronic equipment. Other components can be disposed of in domestic refuse. Thank you for your co-operation!





Factory Team Selected



DECLARATION OF CONFORMITY

Declaration of Conformity Team Corally Race 60 AC

Team Corally, a division of JSP Group Intl BVBA declares under sole responsibility that the battery charger RACE 60 AC with reference nr C-48485 to which this declaration relate, conforms with the following LVD standards;

EN 60335-1:2012 +A1:2014

EN 60335-2-29:2004 +A2:2010

The battery charger RACE 60 AC with reference nr C-48485 also conforms with the following EMC standards;

EN 55014-1:2006 +A1:2009 +A2:2011

EN 55014-2:1997 +A1:2001 +A2:2008

EN 61000-3-2:2014

EN 61000-3-3:2008

observing the provision of 2004/108/EG directive of 15 December 2014.
The battery charger also conforms with the requirements in;

EN 62233:2008



Olen - Belgium
12 March 2016

A handwritten signature in black ink, appearing to read 'Stefan Engelen', is written over a horizontal line.

Stefan Engelen
Ceo





Factory Team Selected





Team Corally
Geelseweg 80
B-2250 Olen (Belgium)
Tel: +32 14 25 92 94 • info@corally.com